

The SENSEI[†] experiment

A zero noise detector for DM searches

Javier Tiffenberg
for the SENSEI Collaboration


April 10, 2018

† Sub-Electron-Noise SkipperCCD Experimental Instrument

SENSEI: lower the energy threshold to look for light DM candidates

Detect DM-e interactions by measuring the ionization produced by the electron recoils. See arXiv:1509.01598

Idea: use electrons in the CCDs as target

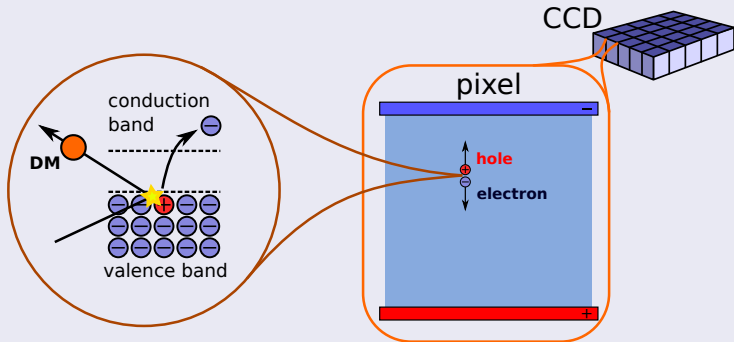

This requires very low noise!

SENSEI LDRD Collaboration (2015)

Develop a CCD-based detector with an energy threshold close to the silicon band gap (1.1 eV) using SkipperCCDs produced at LBL MSL

- **Fermilab:** Tiffenberg, Guardincerri, Sofo Haro
- **Stony Brook:** Rouven Essig
- **LBL:** Steve Holland, Christopher Bebek
- **Tel Aviv University:** Tomer Volansky
- **University of Oregon:** Tien-Tien Yu
- **Stanford University*:** Jeremy Mardon

Successful completion of LDRD objectives (2017)

- Build the first working detector using Skipper-CCDs.
- Validate the technology for DM and ν experiments.
 - ▶ Probe DM masses at the MeV scale through electron recoil.
 - ▶ Probe axion and hidden-photon DM with masses down to 1 eV.

Build a detector using Skipper-CCDs to search for light DM candidates



Stony Brook University



UNIVERSITY OF
OREGON

- **Fermilab:** Michael Crisler, Alex Drlica-Wagner, Juan Estrada, Guillermo Fernandez, Miguel Sofo Haro, Javier Tiffenberg
- **Stony Brook:** Rouven Essig
- **Tel Aviv University:** Liron Barack, Erez Ezion, Tomer Volansky
- **Oregon University:** Tien-Tien Yu
- + several additional students + more to come


Fully funded by Heising-Simons Foundation & Fermilab




HEISING-SIMONS
FOUNDATION

3x3 pixels CCD



Shift charge one column to the right

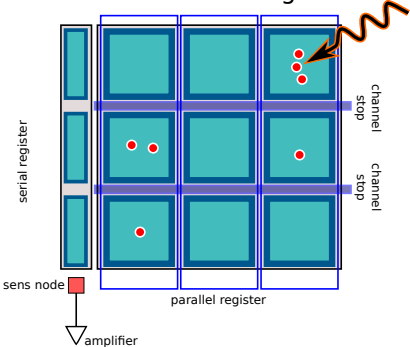


Shift charge in serial register one pixel down (3 times)

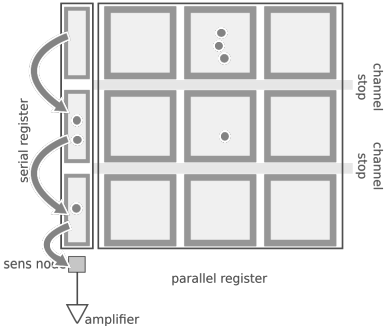

3x3 pixels CCD

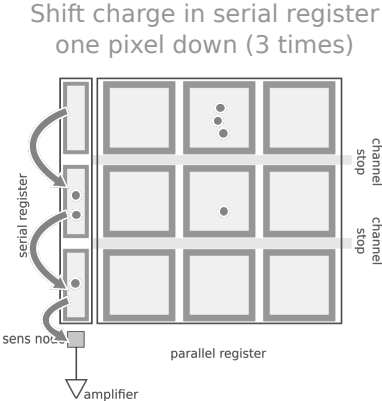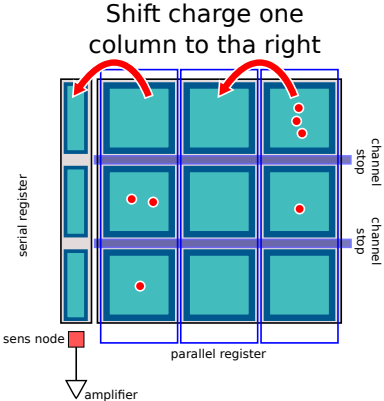


3x3 pixels CCD



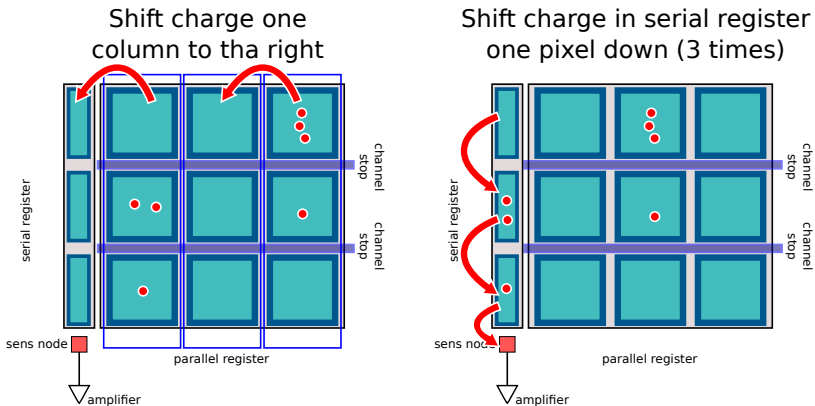


capacitance of the system is set by the SN: $C=0.05\text{pF} \rightarrow 3\mu\text{V}/e$

CCD: readout

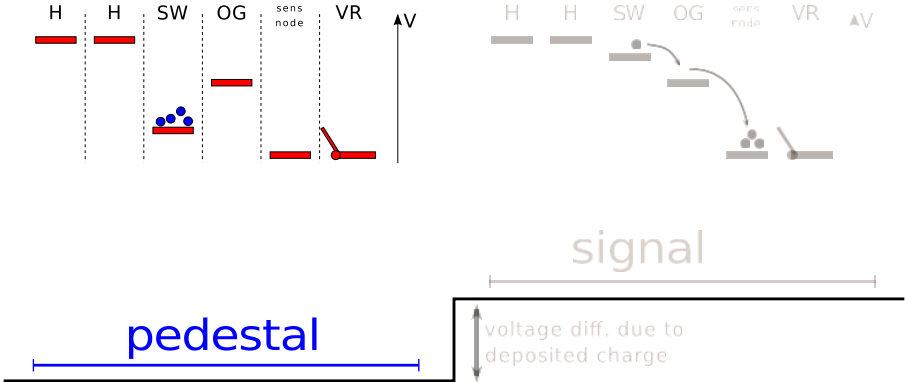


CCD: readout

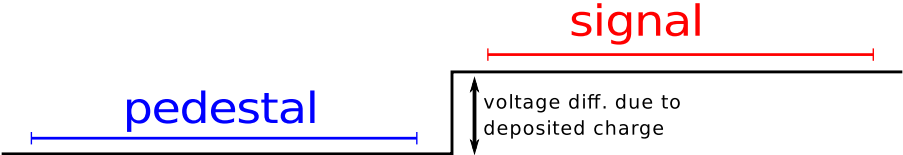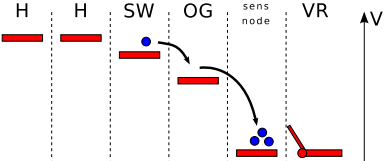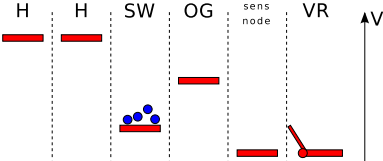


CCD: readout


pixel charge measurement



high frequency noise




low frequency noise




excellent for removing high frequency noise but sensitive to low frequencies

Readout noise: empty pixels distribution, regular scientific CCD

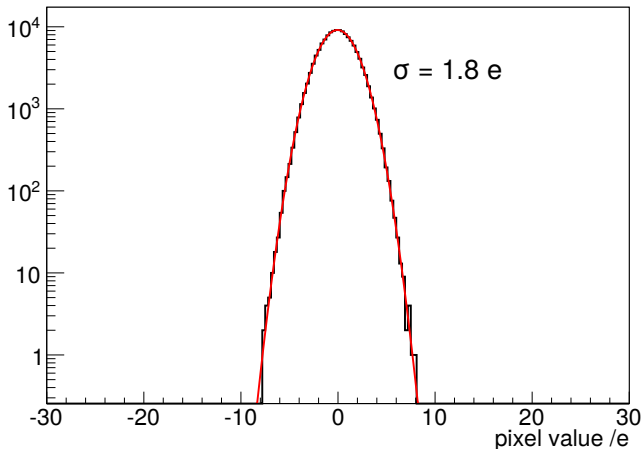

2 e⁻ readout noise roughly corresponds to 50 eV energy threshold


Lowering the noise: Skipper CCD

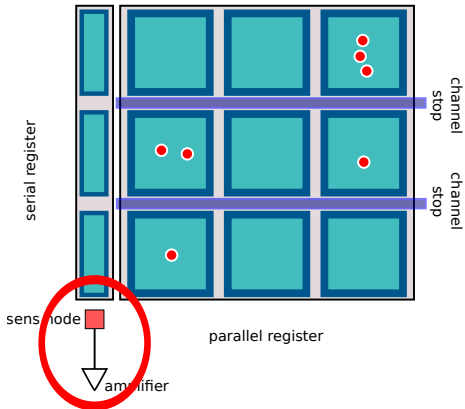

Only the readout stage is modified


Lowering the noise: Skipper CCD

- **Main difference:** the Skipper CCD allows multiple sampling of the same pixel without corrupting the charge packet.
- The final pixel value is the average of the samples
Pixel value = $\frac{1}{N} \sum_i^N (\text{pixel sample})_i$
- Idea proposed in 1990 by Janesick et al. (doi:10.1117/12.19452)

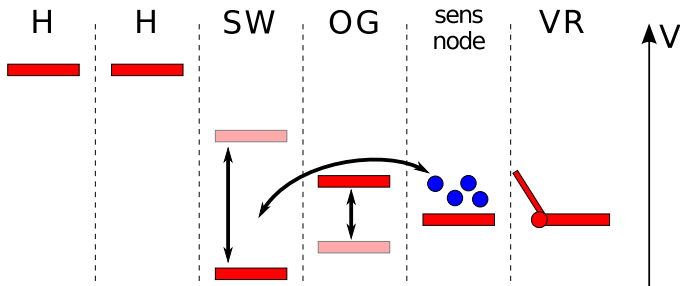


Lowering the noise: Skipper CCD

- **Main difference:** the Skipper CCD allows multiple sampling of the same pixel without corrupting the charge packet.
- The final pixel value is the average of the samples
Pixel value = $\frac{1}{N} \sum_i^N (\text{pixel sample})_i$
- Idea proposed in 1990 by Janesick et al. (doi:10.1117/12.19452)

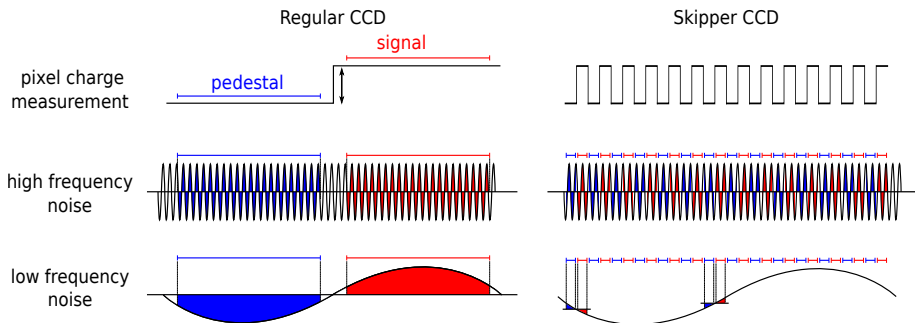


SENSEI: First working instrument using SkipperCCD tech

Sensors



- Skipper-CCD prototype designed at LBL MSL
- 200 & 250 μm thick, 15 μm pixel size
- Two form factors 4k \times 1k (0.5gr) & 1.2k \times 0.7k pixels
- Parasitic run, optic coating and Si resistivity $\sim 10\text{k}\Omega$
- 4 amplifiers per CCD, three different RO stage designs

Instrument



- System integration done at Fermilab
- Custom cold electronics
- Modified DES electronics for read out
- Firmware and image processing software
- Optimization of operation parameters

Image taken with SENSEI: 4000 samples per pixel (processed)

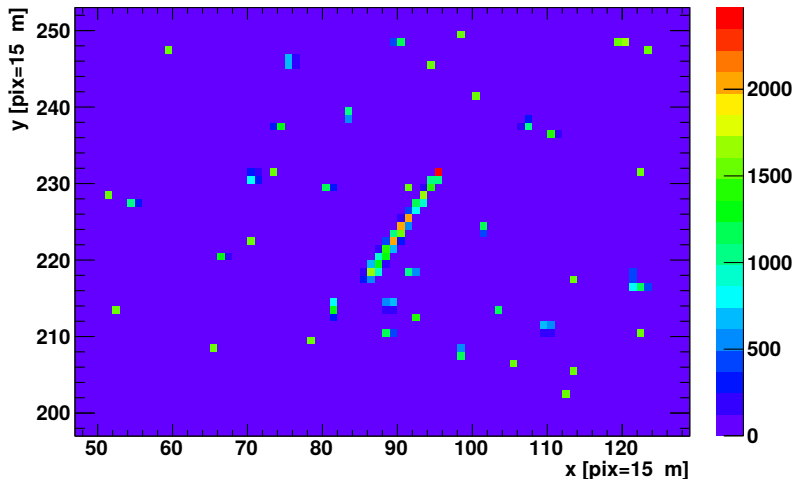


Image taken with SENSEI: 4000 samples per pixel (processed)

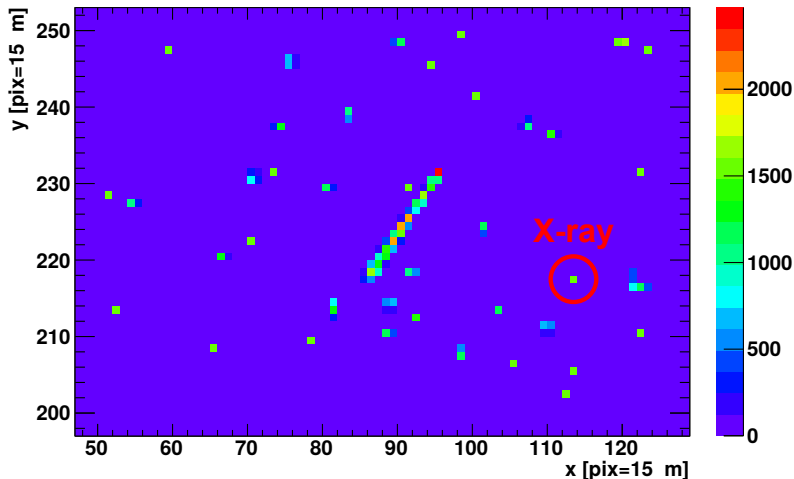


Image taken with SENSEI: 4000 samples per pixel (processed)



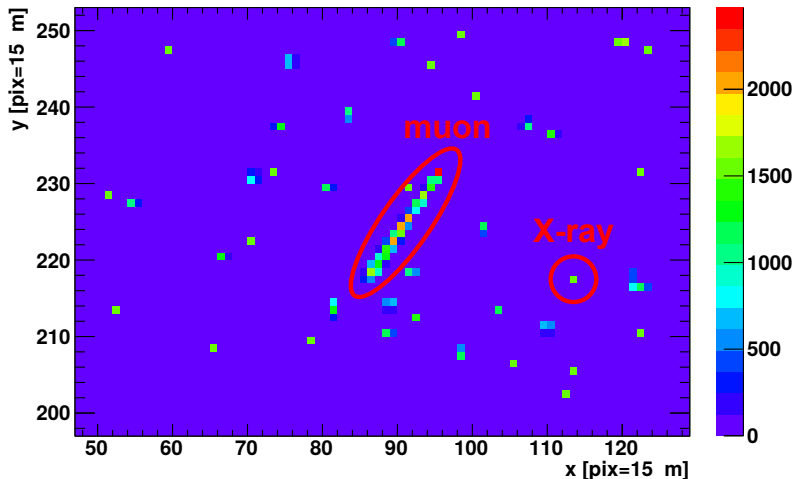



Image taken with SENSEI: 4000 samples per pixel (processed)

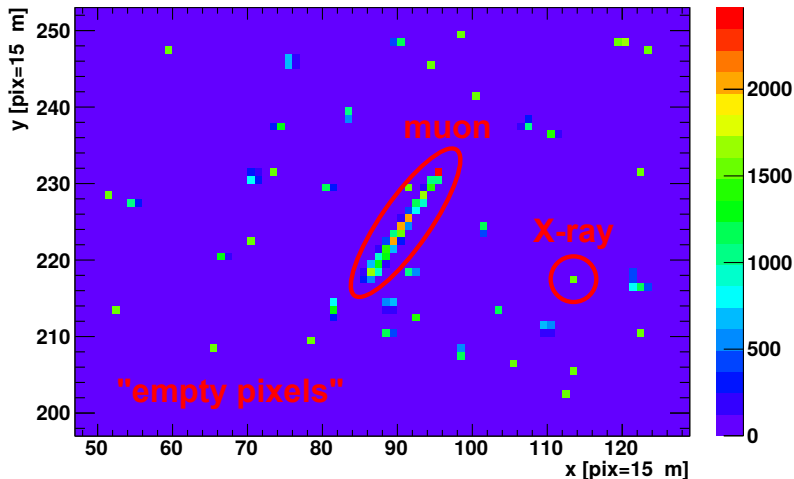

Charge in pixel distribution. Counting electrons: 0, 1, 2..

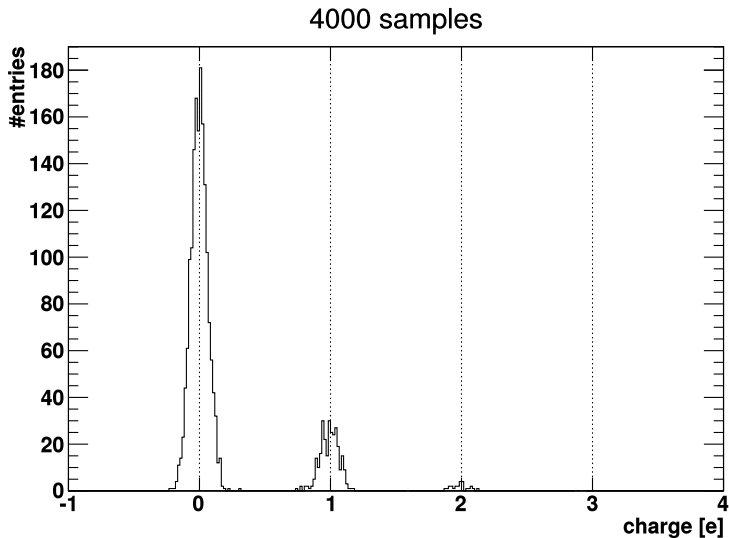


Charge in pixel distribution. Counting electrons: 0, 1, 2..

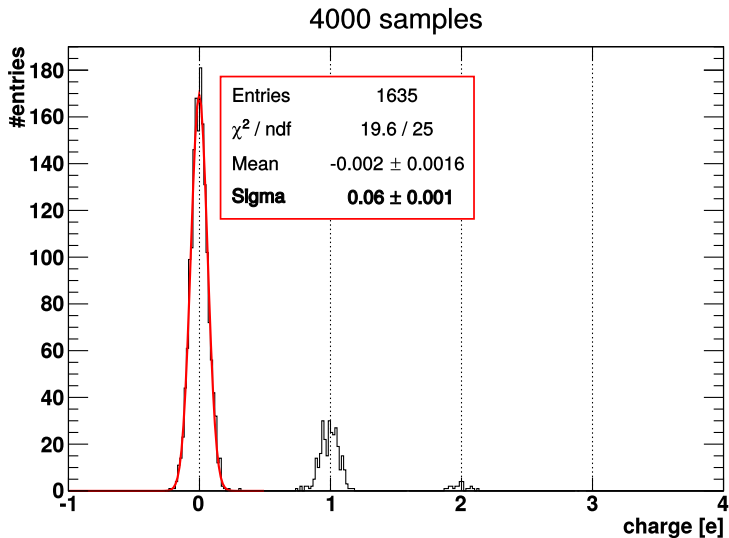


Counting electrons: 0, 1, 2..


Standard CCD mode: charge in each pixel is measured once




Readout-noise: 3.5 e RMS




New Skipper CCD: charge in each pixel is measured multiple times





Readout-noise: 0.06 e RMS



Counting electrons: ..48, 49, 50..

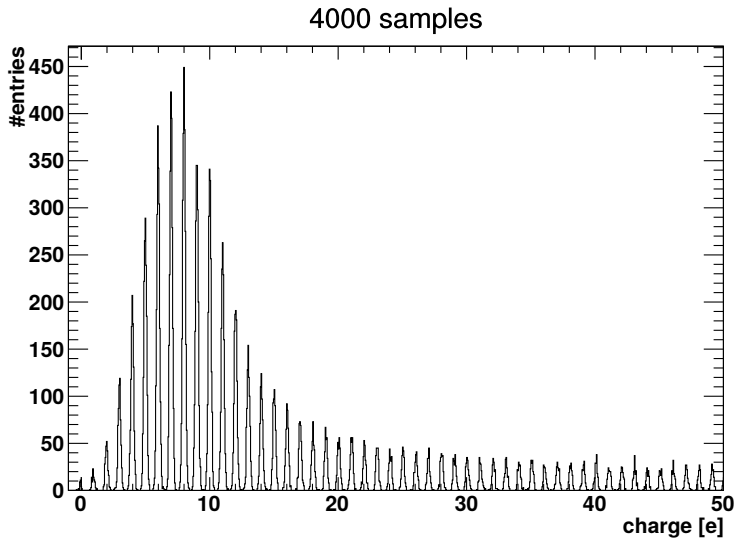

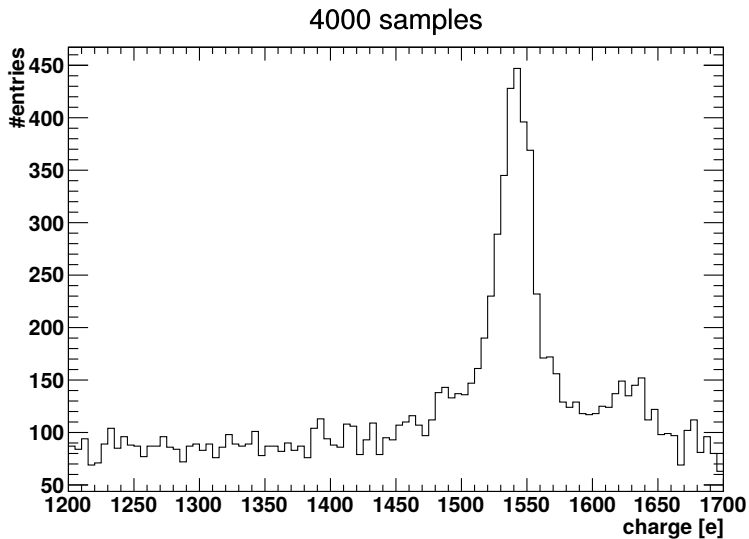

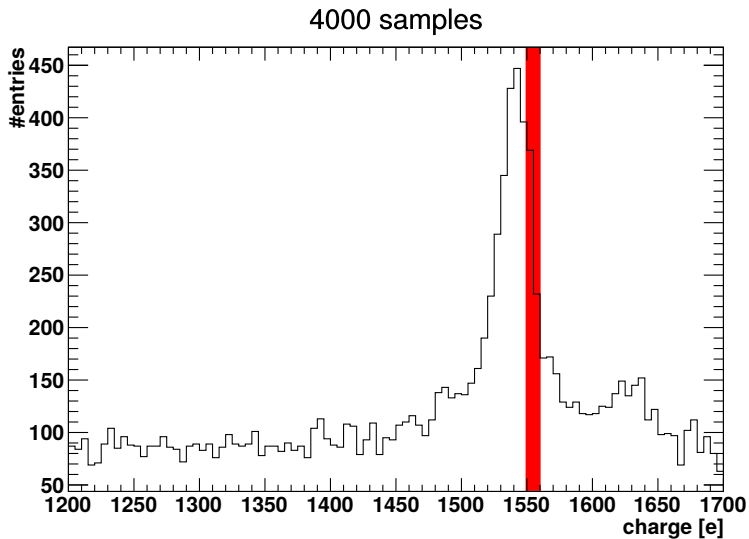


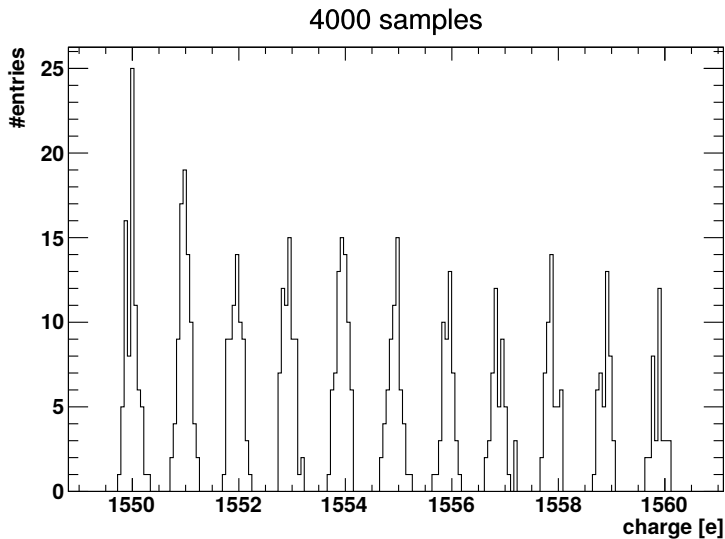



Image taken with SENSEI: 20 samples per pixel

Single pixel distribution: X-rays from ^{55}Fe

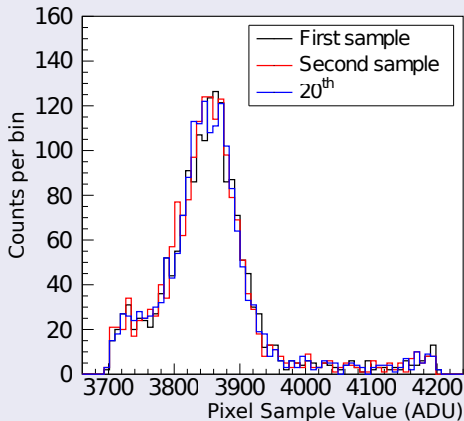

The gain is the same for all the samples

Noise vs. #samples - $1/\sqrt{N}$

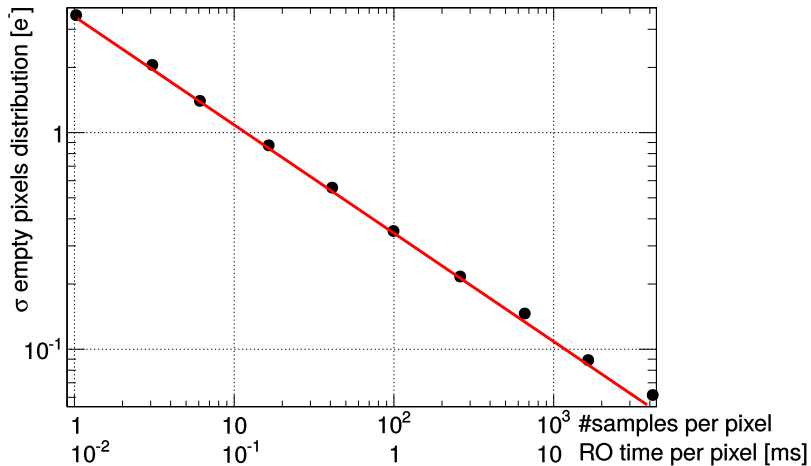

SENSEI: DM search operation mode

- Counting electrons \Rightarrow **noise has zero impact**
- It can take about 1h to read the sensors
- **Dark Current is the limiting factor**

It's better to readout continuously to minimize the impact of the DC

Dark Current [$e^- \text{pix}^{-1} \text{day}^{-1}$]	$\geq 1e^-$ [pix]	$\geq 2e^-$ [pix]	$\geq 3e^-$ [pix]
10^{-3}	1×10^8	3×10^3	7×10^{-2}
10^{-5}	1×10^6	3×10^{-1}	7×10^{-8}
10^{-7}	1×10^4	3×10^{-5}	7×10^{-14}


Measured upper limit for the DC in CCDs is:

$$1 \times 10^{-3} \text{ e pix}^{-1} \text{day}^{-1} \quad \text{arXiv:1611.03066}$$


Could be orders of magnitude lower. **Theoretical prediction is $O(10^{-7})$**

SENSEI: reach of a 100g, zeroish-background experiment

Light Dark Photon

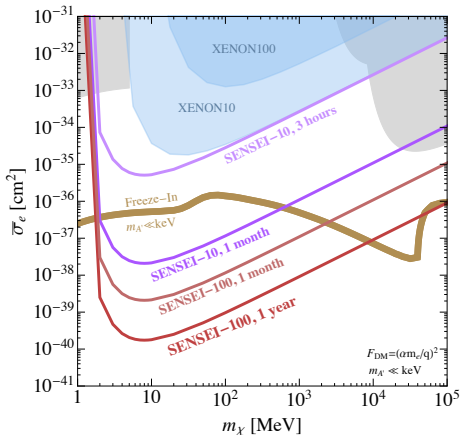


Heavy Dark Photon

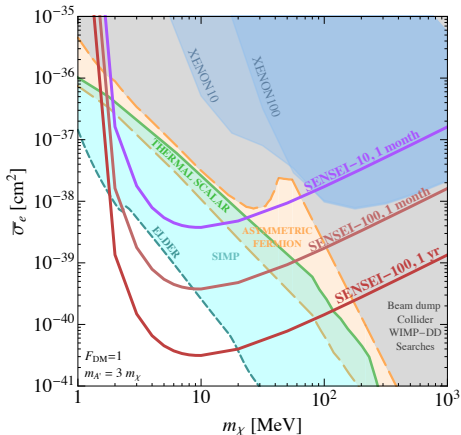


SENSEI: reach of a 100g, zeroish-background experiment



Dark photon (A')

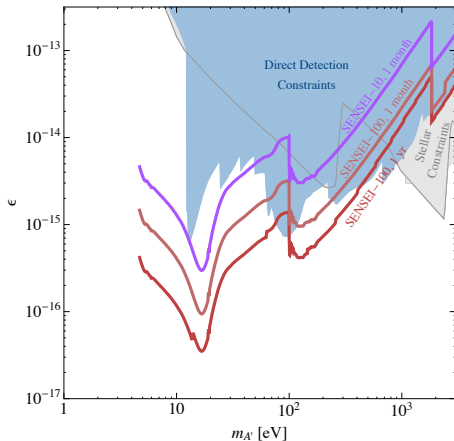

Axion-like-particle (ALP)

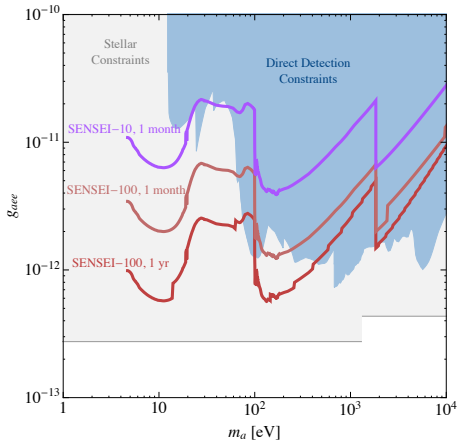

The sensitivity is dominated by the lowest energy/charge bin

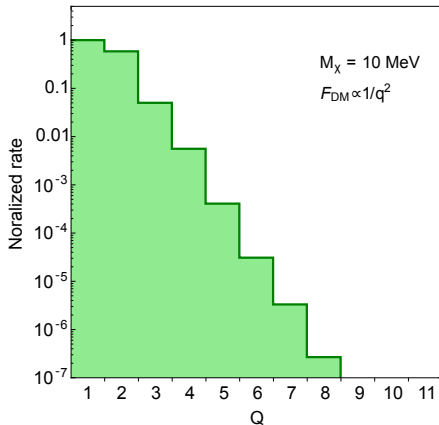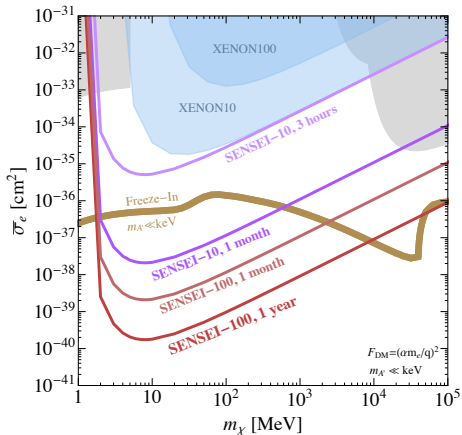

Back of the envelope calculation

A 100g detector that takes data for one year \rightarrow **Expo = 36.5kg · day**

Assuming same background as in DAMIC:


- **5 DRU** ($\text{events} \cdot \text{kg}^{-1} \cdot \text{day}^{-1} \cdot \text{keV}^{-1}$) in the 0-1keV range
 \rightarrow **$N_{\text{bkg}} = 36.5 \text{ kg} \cdot \text{day} \times 5 \text{ DRU} = 182.5$ events**
- Dominated by external gammas \rightarrow flat Compton spectrum

Back of the envelope calculation

A 100g detector that takes data for one year \rightarrow **Expo = 36.5kg · day**

Assuming same background as in DAMIC:

- **5 DRU** ($\text{events} \cdot \text{kg}^{-1} \cdot \text{day}^{-1} \cdot \text{keV}^{-1}$) in the 0-1keV range
 $\rightarrow N_{\text{bkg}} = 36.5 \text{ kg} \cdot \text{day} \times 5 \text{ DRU} = 182.5 \text{ events}$
- Dominated by external gammas \rightarrow **flat Compton spectrum**


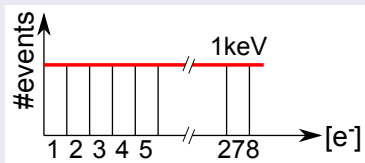


182.5 events over the 278 charge bins in the 0-1keV range


Expect 0.65 bkd events in the lowest (2 e⁻) charge-bin

Whats going on now: Installation @MINOS


Technology demonstration: installation at shallow underground site

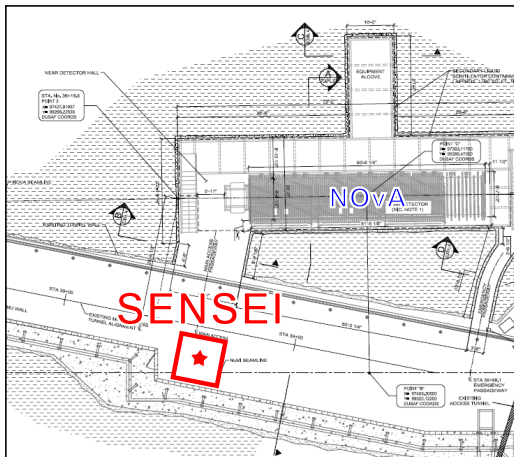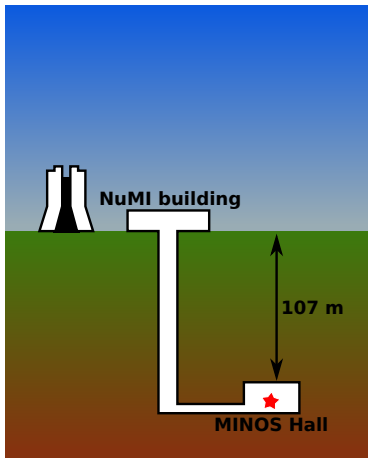


Whats going on now: Installation @MINOS



Observed spectrum using 800 samples per pixel

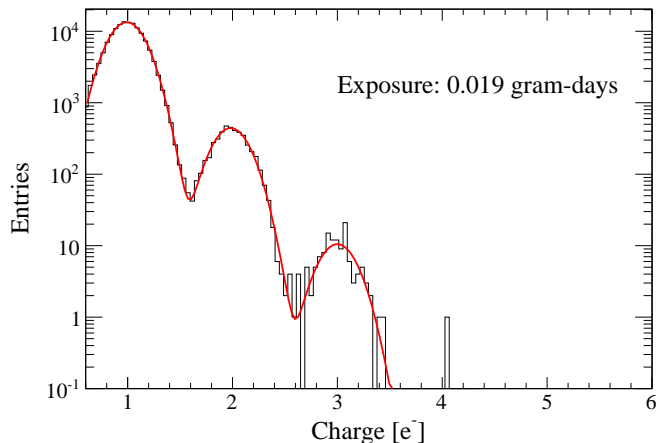

dark current: $\sim 1.1 e^-$ /pix/day; no events with 5-100 electrons

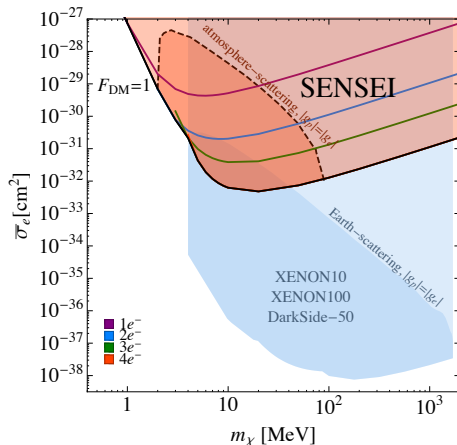First direct-detection constraints between ~ 500 keV to 4 MeV!

Terrestrial effects: Timon Emken, RE, Kouvaris, Mukul Sholapurkar (to appear)

Timeline

2016

LDRD funded,
fabrication of SkipperCCD
prototype

2017

testing of prototype,
received funding from HSF
for S-10 and S-100

2018

assembly and testing of S-10,
take data

2019

take more data with S-10, begin analysis
assembly and testing of S-100

2020

continue S-10 analysis,
take data with S-100


2021

S-100 analysis


Summary

- SENSEI is the first dedicated experiment searching for electron recoils
- SENSEI's first results, using a prototype detector on the surface, probes 0.5-4 MeV masses for the first time, and larger cross sections than existing sub-GeV direct-detection constraints
- SENSEI experiment will use better sensors & collect almost 2 million times the exposure of this surface run in next $\sim 2-3$ years, probing large regions of uncharted territory populated by popular models
- Fully funded: 10g & 100g design/construction started.
 - ▶ Grant from Heising-Simons Foundation
 - ▶ Full technical support from Fermilab

BACK UP SLIDES

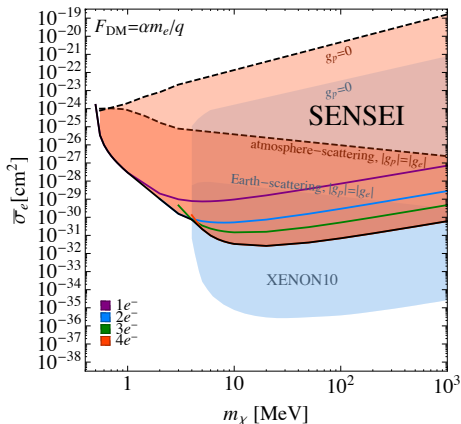First direct-detection constraints between ~ 500 keV to 4 MeV!

Terrestrial effects: Timon Emken, RE, Kouvaris, Mukul Sholapurkar (to appear)

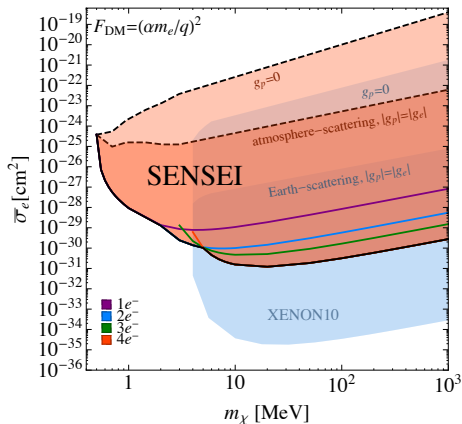
First direct-detection constraints between ~ 500 keV to 4 MeV!

Terrestrial effects: Timon Emken, RE, Kouvaris, Mukul Sholapurkar (to appear)

Skipper CCD - electron recoil background requirements

A more detailed analysis: Klein-Nishina + binding energy correction


- at lower energies atomic binding energies are relevant
- partial energy depositions populate low E region (thin det)

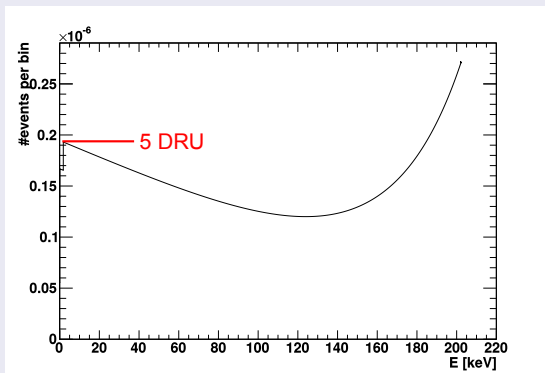

Skipper CCD - electron recoil background requirements

A more detailed analysis: Klein-Nishina + binding energy correction


- at lower energies atomic binding energies are relevant
- partial energy depositions populate low E region (thin det)

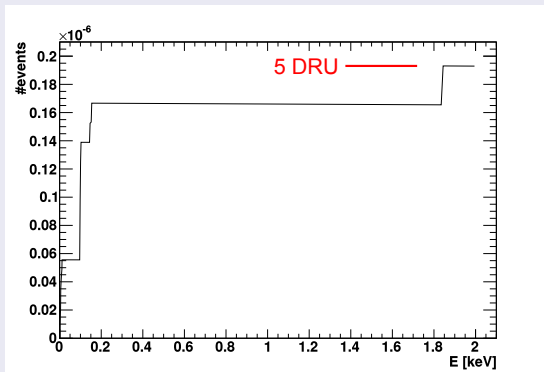

Skipper CCD - electron recoil background requirements

A more detailed analysis: Klein-Nishina + binding energy correction


- at lower energies atomic binding energies are relevant
- partial energy depositions populate low E region (thin det)

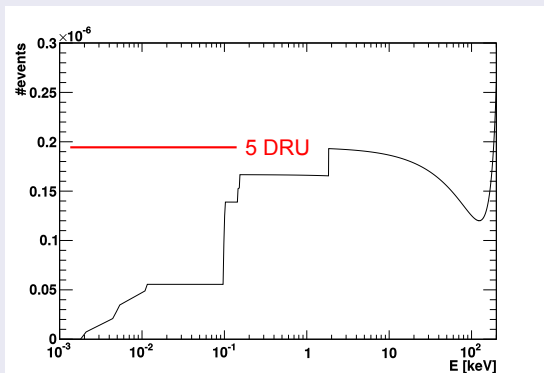

Skipper CCD - electron recoil background requirements

A more detailed analysis: MC simulation, G4 3D Monash model


- at lower energies atomic binding energies are relevant
- **partial energy depositions populate low E region (thin det)**

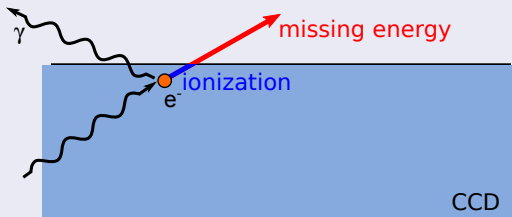

Skipper CCD - electron recoil background requirements

A more detailed analysis: MC simulation, G4 3D Monash model


- at lower energies atomic binding energies are relevant
- **partial energy depositions populate low E region (thin det)**

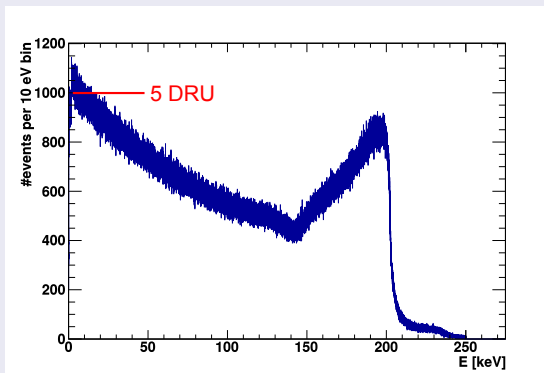

Skipper CCD - electron recoil background requirements

A more detailed analysis: MC simulation, G4 3D Monash model


- at lower energies atomic binding energies are relevant
- **partial energy depositions populate low E region (thin det)**

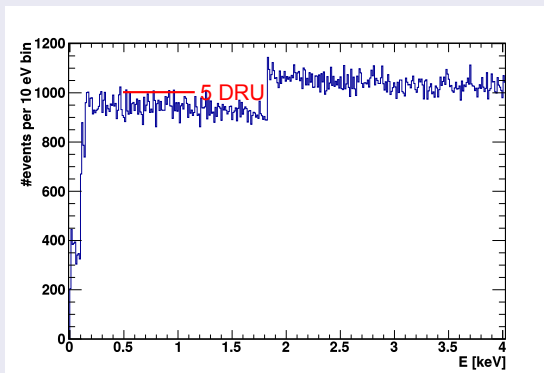

Skipper CCD - electron recoil background requirements

A more detailed analysis: MC simulation, G4 3D Monash model

- at lower energies atomic binding energies are relevant
- **partial energy depositions populate low E region (thin det)**

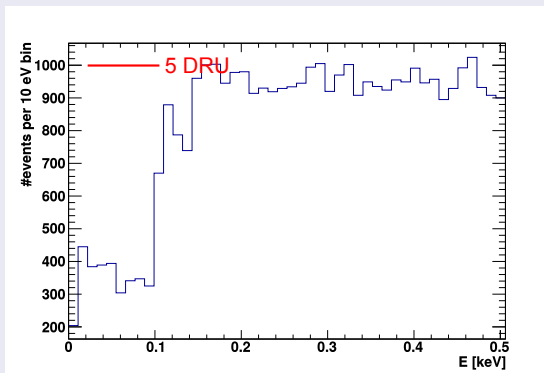

A more detailed analysis: MC simulation, G4 3D Monash model

- at lower energies atomic binding energies are relevant
- **partial energy depositions populate low E region (thin det)**

**Back of the envelope
estimation is conservative**

